


P6 OUTDOOR SMD 3IN1 TECHNICAL PARAMETERS

	Item	Parameter
Unit Module	Model Number	P6-8S
	Module size	192mm*192mm
	Pixel pitch	6mm
	Pixels Density	27777dots /m ²
	Pixel configuration	1R1G1B
	LED Package mode	SMD3535/2727
	Pixel resolution	32dots(W)*32dots(H)
	Max Power	35W
	Module thickness	17.05mm
	Weight	0.369kg
	Drive type	Constant drive
	Scan mode	1/8 1/8scan
	Port type	HUB75-A
	Brightness of white balance	>6500cd/m ²

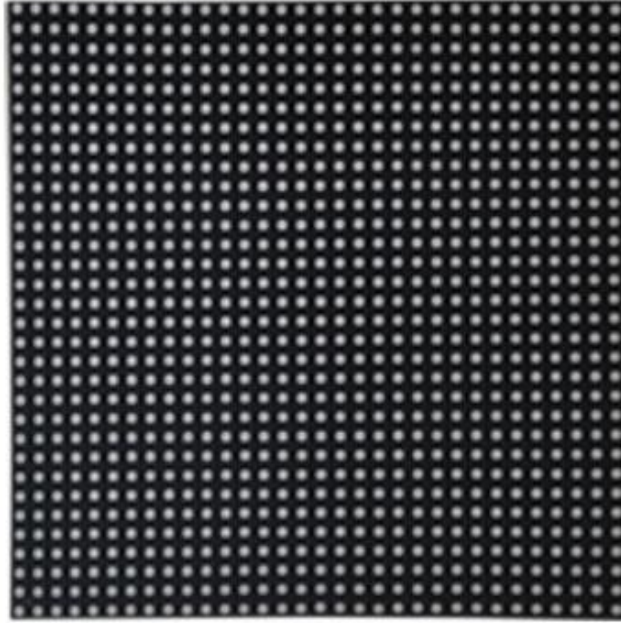

192mm*192mm

LED	Dimension	576mm*576mm
-----	-----------	-------------

Cabinet	Monomer Module Number	9pcs
	Power supply	5V/40A*2 pcs
	Thermal discharge	fan 1pcs
	Pixel per cabinet	96mm*96mm
	Best viewing distance	6M 40M
	Best viewing angle	160 (W) 120 (H)
	Temperature	storage:-35 +85 working:-20 +50
	Relative humidity	10%-95%
	Thickness	65mm

Power	Working voltage	AC110V 220V 10%
	Average Power consumption	<380W/
	Max.Power consumption	<950W/
	Current	<20mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	>1800HZ
	/ Grey scale/colors	16384 , 16.7M 16384gray level/16.7M colors
	MTBF	>9000hours
	Power switch	Automatic switch
	Display Mode	800*600/1024*768